



CAT 6A S/FTP CABLE LSZH SHEATH

108-92011

Phone
+33 75 864 2169

Email
info@angnetworks.com

Log 202, 5rue Albert Thomas, 38100
Grenoble, France.



Overview

- Category: S/FTP-CAT6A-4P- LSZH-AM40
- Sheath Printing: TBD
- Construction Type: S/FTP (Shielded and Foiled Twisted Pair)
- High-performance networking applications requiring high data rates and reliability.

Industry Standard

- ISO/IEC11801
- TIA-568-C.2

Applications


- Horizontal Cabling Above Suspended Ceilings
- Horizontal Cabling Below Raised Flooring
- Ethernet Network Cabling – EIA568

Ordering Information

Part Number	Description
108-92011	CAT 6A S/FTP CABLE LSZH SHEATH

General Information

- Conductor Material: Solid Bare Copper
- Nominal Outer Diameter (O.D.): 0.560 mm
(up +0.005, down -0.005)
- Insulation Material: Skin-Foam-Skin PE
- Insulation Diameter: 1.330 ± 0.05mm
- Inner Screening Material: AL/Mylar
- Drain Wire: Yes
- Outer Screening Material: Aluminum-magnesium alloy
- Screening Coverage: ≥40%
- Sheath Thickness: 0.55 ± 0.05 mm
- External O.D.: 7.5 ± 0.5 mm
- Sheath Material: LSZH (Low Smoke Zero Halogen),
complies with RoHS
- Surface Clean Material: LSZH(complies RoHS)
- Surface Printing: Letter height 3.0 ± 0.3mm, Color: Black,
Print error & Space: ≤±0.5%, 1m
- Core Color:
 1. White/Blue
 2. White/Orange
 3. White/Green
 4. White/Brown
- Rip-cord: Yes

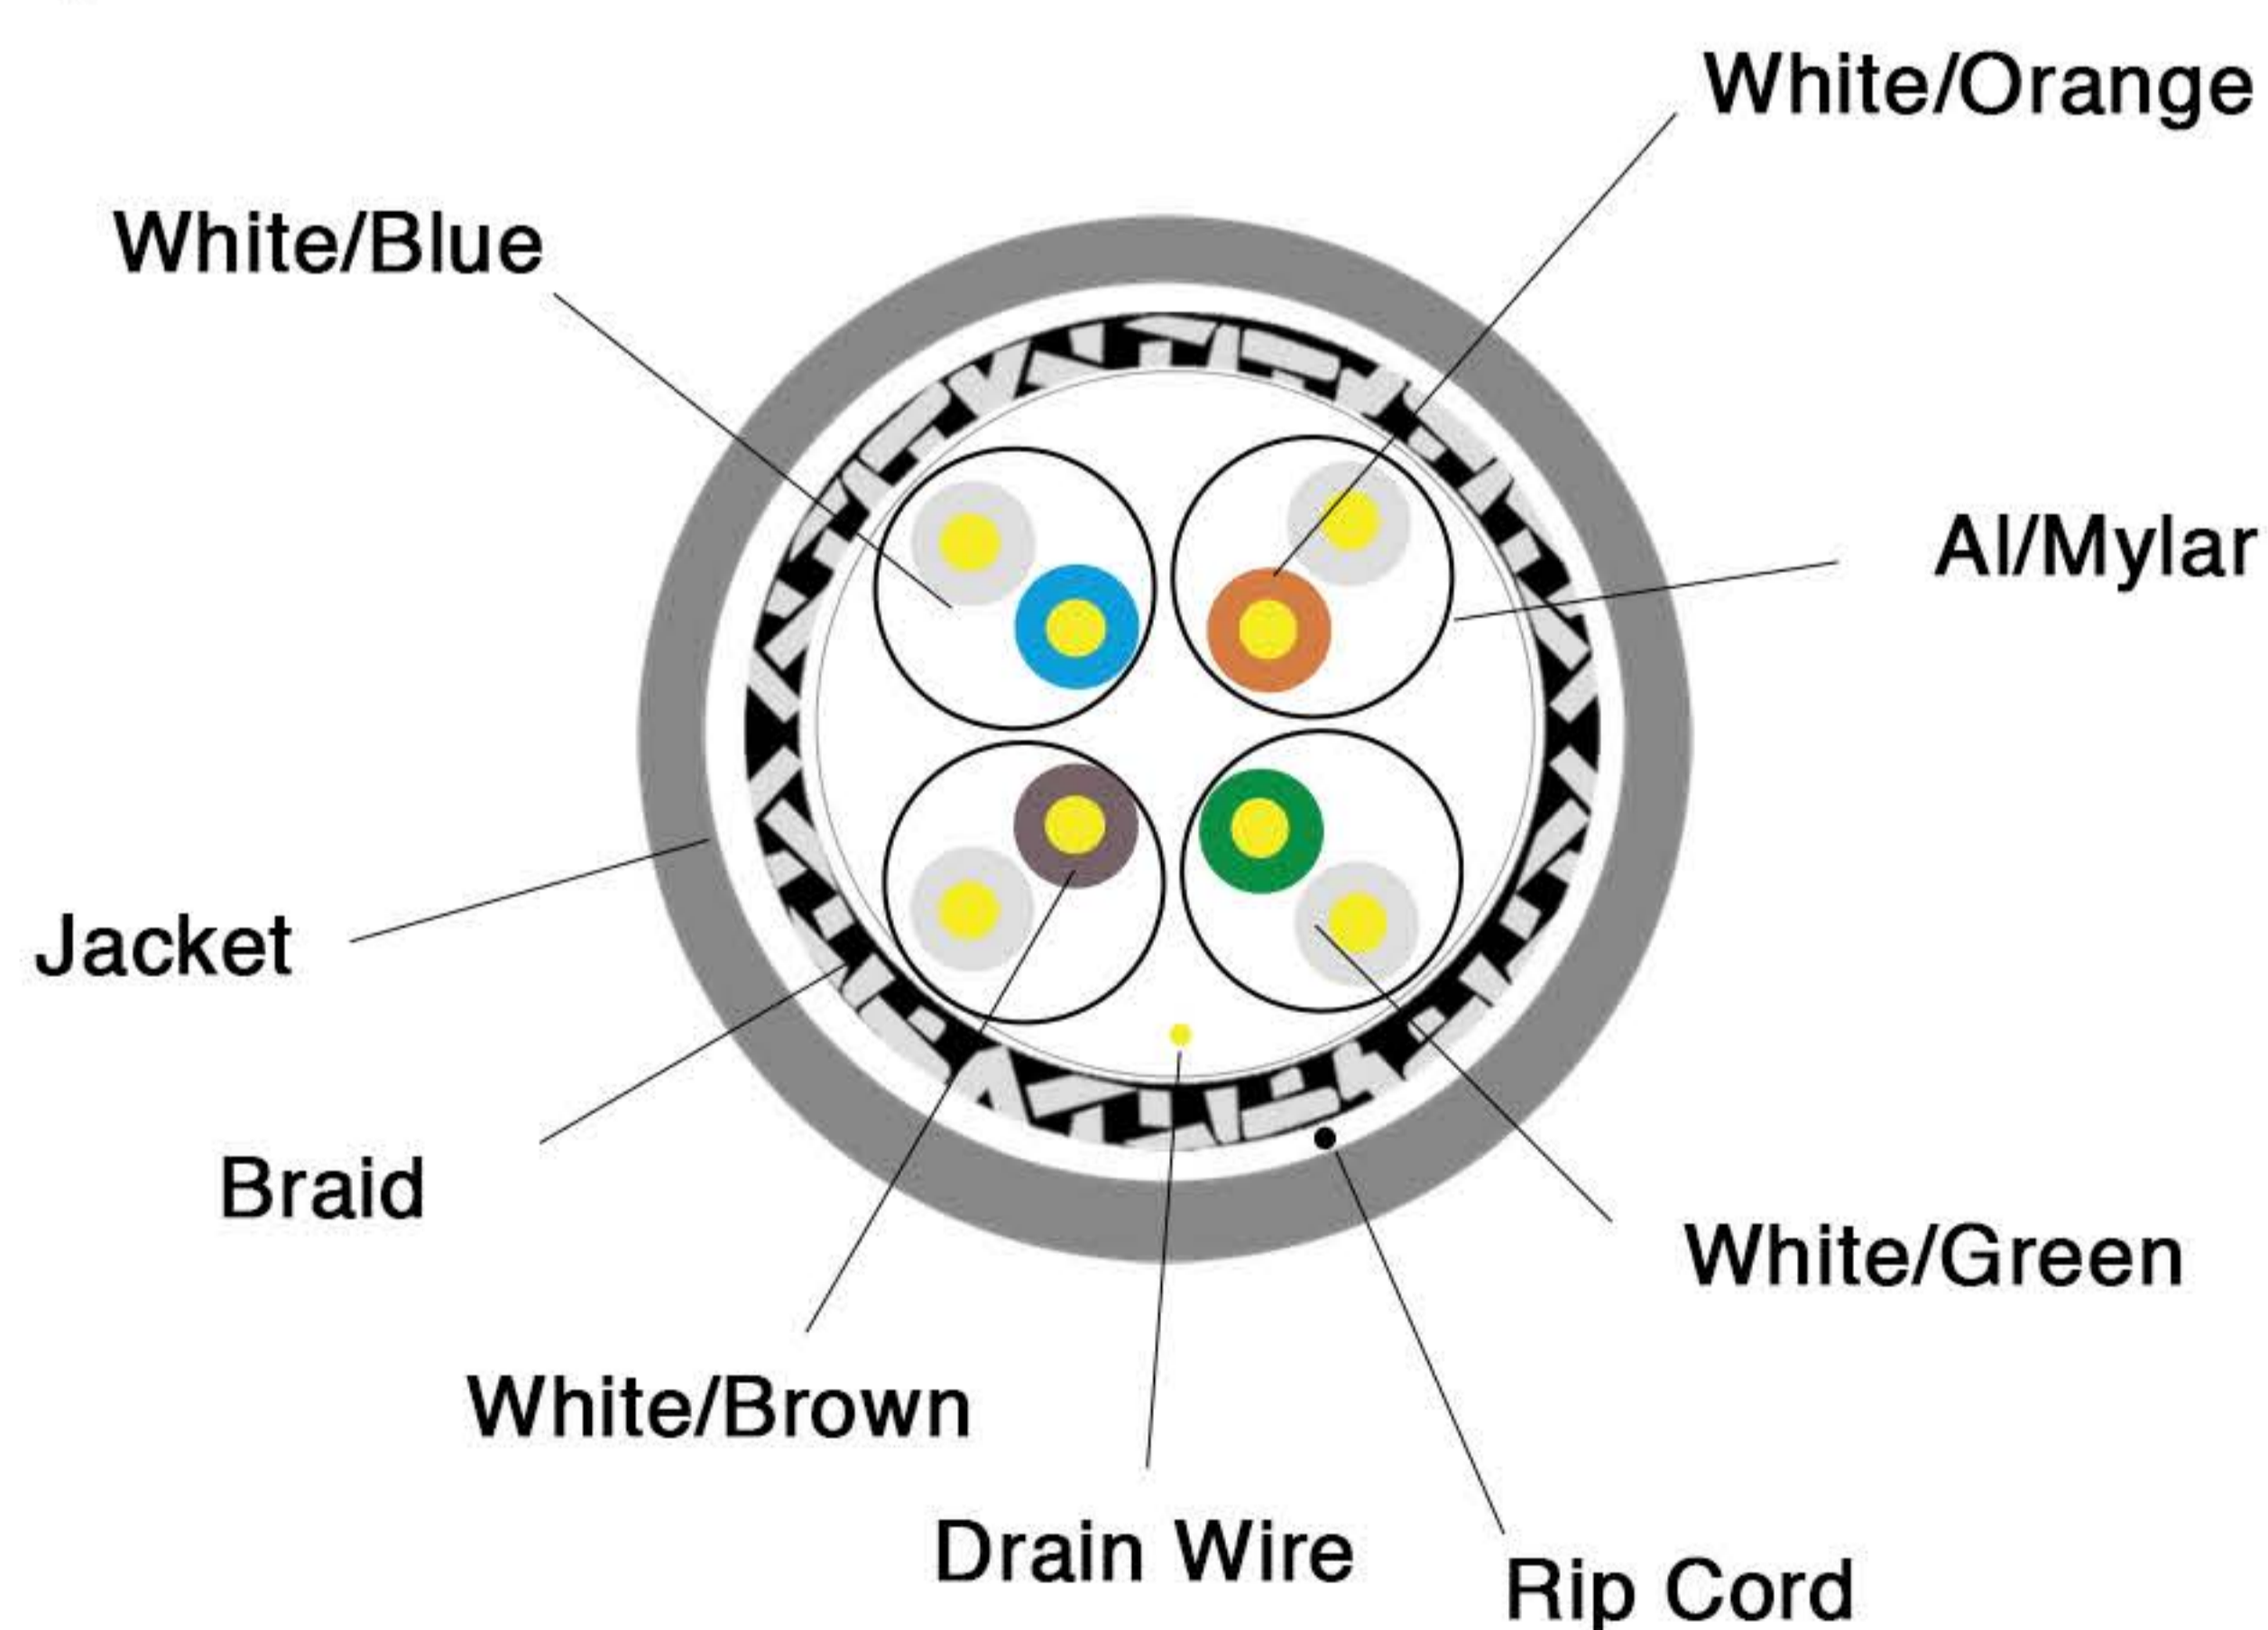

PRODUCT TECHNICAL SPECIFICATION | CAT 6A S/FTP CABLE LSZH SHEATH

Product Electrical Characteristics:

- Impedance: $100\pm 15\Omega$ (1-250MHz)
 $100\pm 22\Omega$ (250-500MHz)
- Delay Skew: ≤ 45 ns/100m (1.0-500MHz)
- Unbalanced to Ground Capacitance: ≤ 330 pf/100m
- DC Resistance: $\leq 9.38\Omega/100m$
- DC Conductor Resistance Unbalance: $\leq 5.0\%$

Sheath Physical Properties:

- Tensile Strength (Before Aging): ≥ 10.0 MPa
- Elongation (Before Aging): $\geq 125\%$
- Aging Period: $100^\circ\text{C}\times 24\text{h}\times 7\text{d}$
- Tensile Strength (After Aging): ≥ 8.0 MPa
- Elongation (After Aging): $\geq 100\%$
- Cold Bend Test: $(-20\pm 2^\circ\text{C}\times 4\text{h})$ $8\times$ Cable O.D. Without visible cracks
- Installation Temperature: 0°C to $+50^\circ\text{C}$
- Operating Temperature: -20°C to $+60^\circ\text{C}$

Technical Performance (100m)

Frequency (MHz)	RL (\geq dB)	Attenuation (\leq dB)	NEXT (\geq dB)	Delay (\leq ns)
1.0	20.0	2.1	74.3	570.0
4.0	23.0	3.8	65.3	552.0
8.0	24.5	5.3	60.8	546.7
10.0	25.0	5.9	59.3	545.4
16.0	25.0	7.5	56.2	543.0
20.0	25.0	8.4	54.8	542.1
25.0	24.3	9.4	53.3	541.2
31.25	23.6	10.5	51.9	540.4
62.5	21.5	15.0	47.7	538.6
100	20.1	19.1	44.3	537.6
200	18.0	27.6	39.8	536.5
250	17.3	31.1	38.3	536.3
300	16.8	34.3	37.1	536.1
500	15.2	45.3	33.8	535.6

Frequency (MHz)	PSNEXT (db) \geq	ELFEXT (dB) \geq	PSELFEXT (dB) \geq
1.0	72.3	67.8	64.8
4.0	63.3	55.8	52.8
8.0	58.8	49.7	46.7
10.0	57.3	47.8	44.8
16.0	54.4	43.7	40.7
20.0	52.8	37.8	38.8
25.0	41.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8
300	35.1	18.3	15.3
500	31.8	13.8	10.8

HEADQUARTERS



A&G Technologies CO., Limited,
Log 202, 5rue Albert Thomas, 38100
Grenoble, France.

+33 75 864 2169

REGIONAL OFFICE



A&G Technologies (HK) CO., Limited,
Room 803, Chevalier House, 45-51 Chatham Road
South, Tsim Sha Tsui, Kowloon, Hong Kong.

+852 5420 8788

CONNECT THE FUTURE



info@angnetworks.com



www.angnetworks.com