



CAT 6A U/FTP CABLE LSZH SHEATH

108-93001

Phone
+33 75 864 2169

Email
info@angnetworks.com

Log 202, 5rue Albert Thomas, 38100
Grenoble, France.



Overview

- Category: CAT6A
- Construction: U/FTP (Unshielded Foiled Twisted Pair)
- Sheath Printing: TBD
- Suitable for high-speed data transmission in various networking applications.

Industry Standard

- ISO/IEC11801
- TIA-568-C.2

Applications



- Horizontal Cabling Above Suspended Ceilings
- Horizontal Cabling Below Raised Flooring
- Ethernet Network Cabling – EIA568

Ordering Information

Part Number	Description
108-93001	CAT 6A U/FTP CABLE LSZH SHEATH

General Information

- Conductor Material: Solid Bare Copper
- Nominal Outer Diameter: 0.570 mm (up +0.005, down -0.005)
- Insulation Material: Skin-foam-skin PE
- Insulation Diameter: 1.330 ± 0.05 mm
- Screening Material: Al/Mylar
- Drain Wire: Yes
- Sheath Thickness: 0.55 ± 0.05 mm
- External Diameter: 7.3 ± 0.5 mm
- Surface Clean Material: LSZH (complies RoHS)
- Surface Printing: Letter height 3.0 ± 0.3 mm, Color: Black, Print error & Space: $\leq \pm 0.5\%$, 1m
- Core Color:
 1. White/Blue
 2. White/Orange
 3. White/Green
 4. White/Brown
- Packing: Drum Packing, length 305 ± 1.5 m,
- Rip-cord: Yes

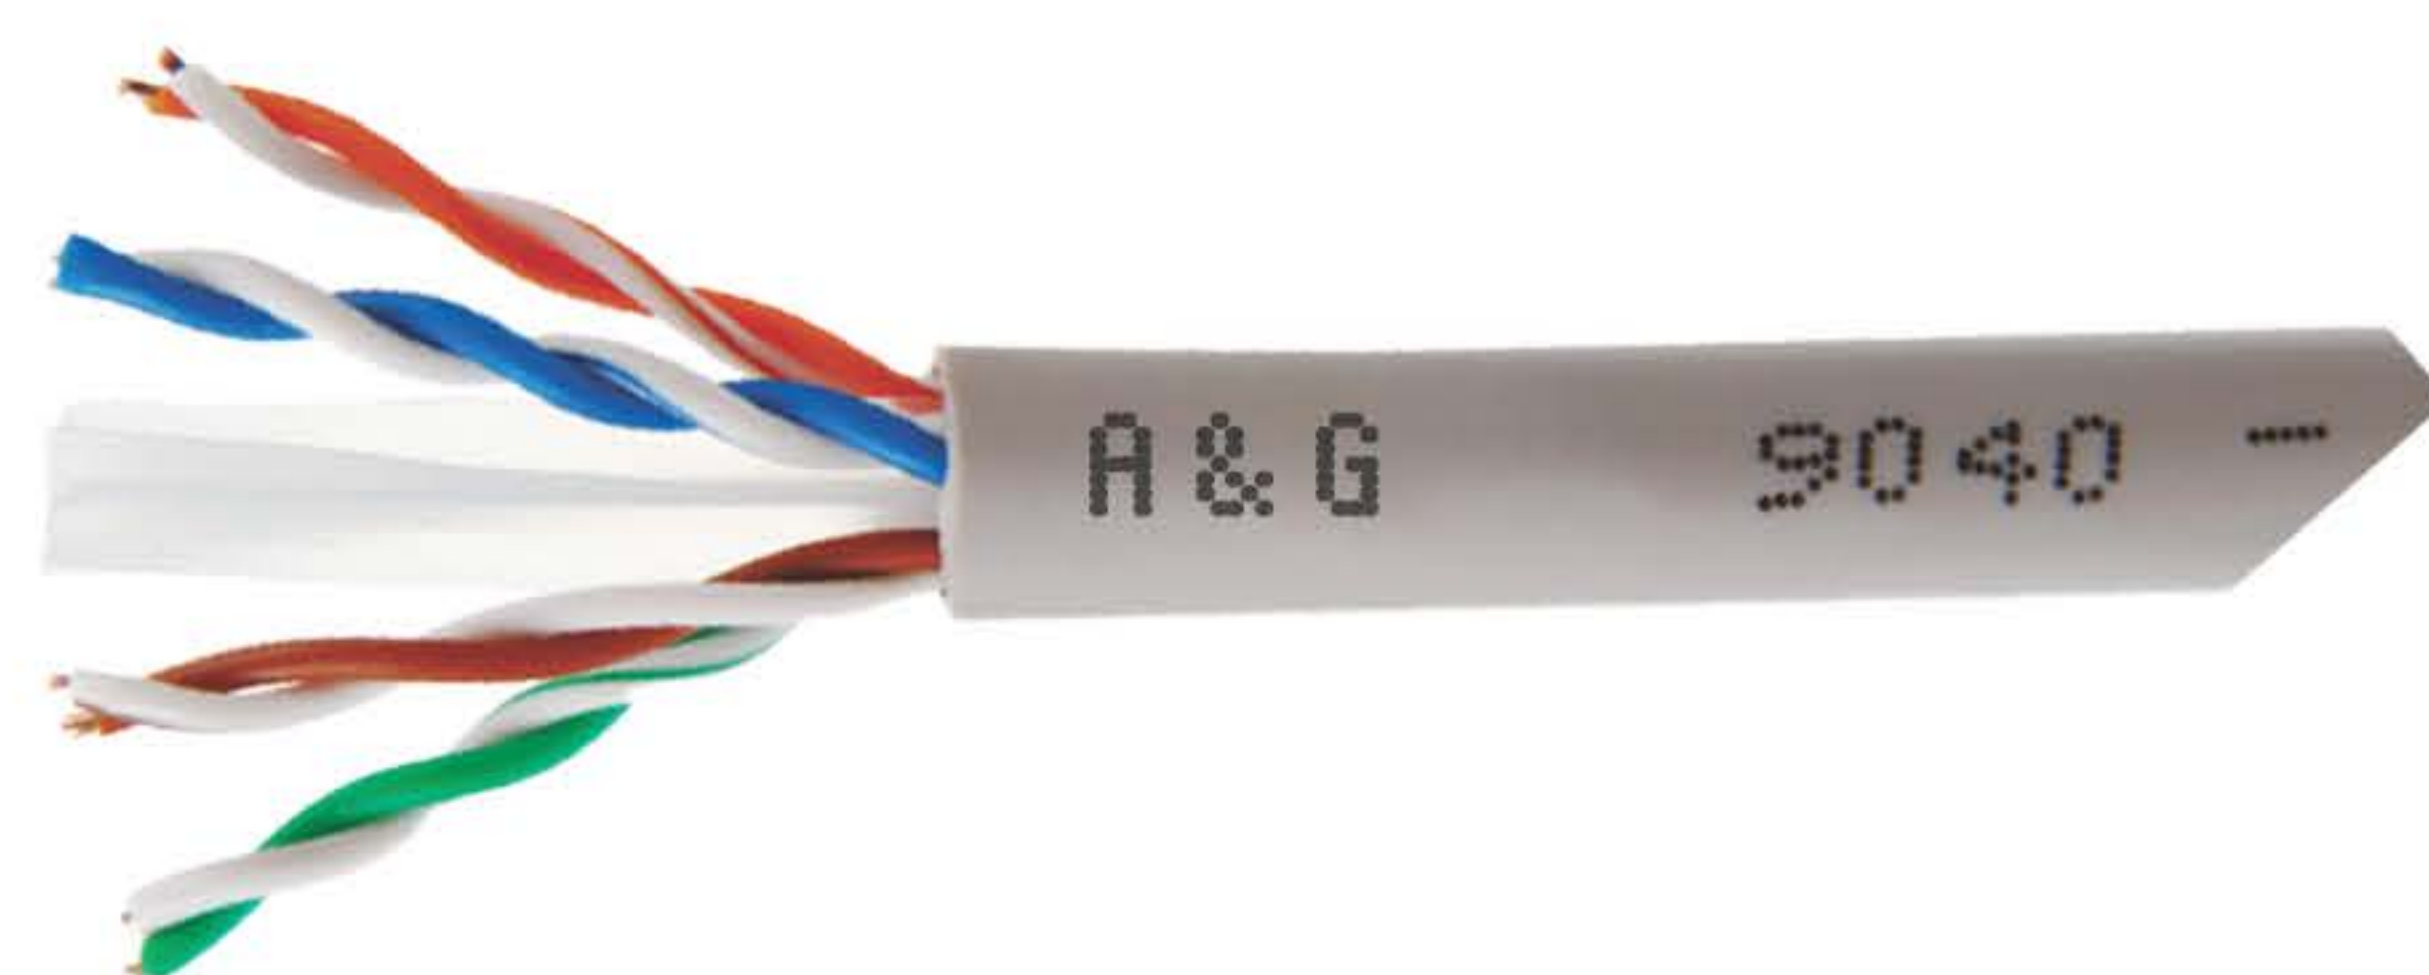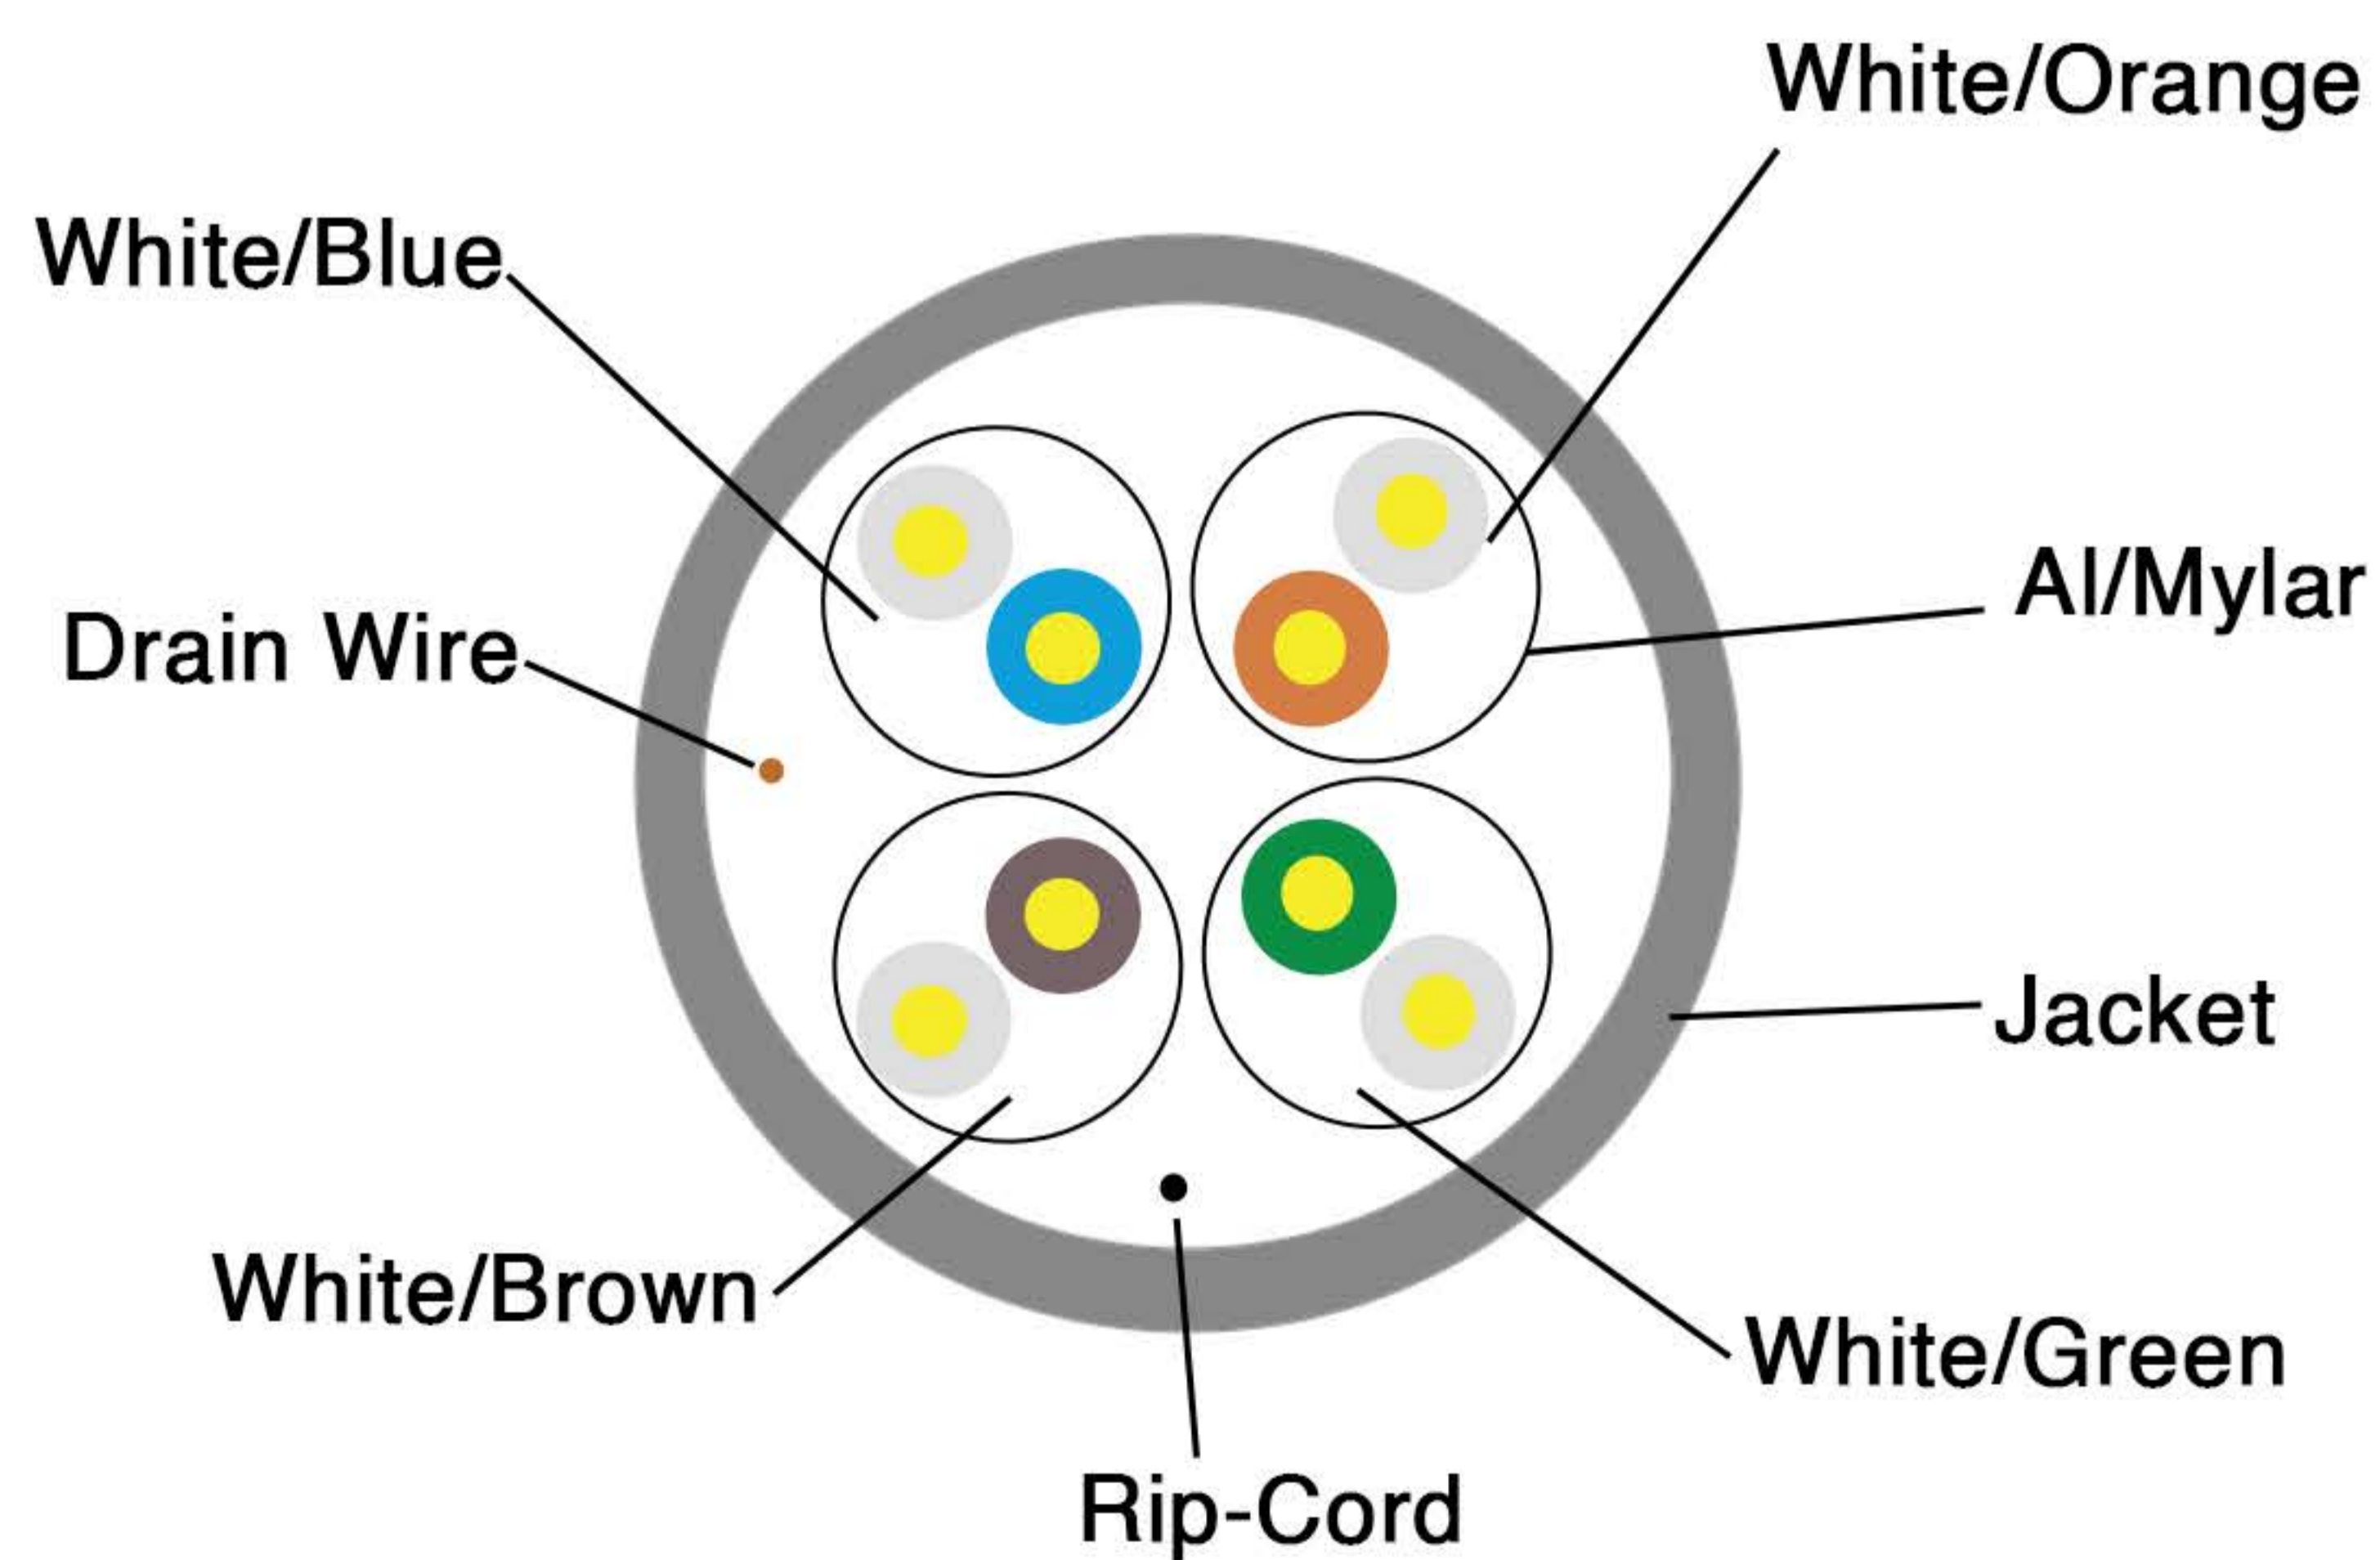

PRODUCT TECHNICAL SPECIFICATION | CAT 6A U/FTP CABLE LSZH SHEATH

Product Electrical Characteristics:

- Impedance:
- 1.0-250.0MHz: 100±15 Ω
- 250.0-500.0MHz: 100±22 Ω
- Delay Skew (ns/100m): ≤45
- Unbalanced-to-ground capacitance (pf/100m): max 330
- DC Resistance (Ω/100m): max 9.38
- DC Conductor Resistance Unbalance (%): max 5.0

Sheath Physical Properties:

- Before Aging: Tensile Strength: ≥10.0 Mpa, Elongation: ≥125%
- Aging Period: 100°C x 24h x 7d
- After Aging: Tensile Strength: ≥8.0 Mpa, Elongation: ≥100%
- Cold bend: -20 ± 2°C x 4h, 8 x Cable O.D., No visible cracks
- Installation Temperature: 0°C to +50°C
- Operating Temperature: -20°C to +60°C

Technical Performance (100m)

Frequency (MHz)	RL (≥dB)	Attenuation (≤dB)	NEXT (≥dB)	Delay (≤ns)
1.0	20.0	2.1	74.3	570.0
4.0	23.0	3.8	65.3	552.0
8.0	24.5	5.3	60.8	546.7
10.0	25.0	5.9	59.3	545.4
16.0	25.0	7.5	56.2	543.0
20.0	25.0	8.4	54.8	542.1
25.0	24.3	9.4	53.3	541.2
31.25	23.6	10.5	51.9	540.4
62.5	21.5	15.0	47.7	538.6
100	20.1	19.1	44.3	537.6
200	18.0	27.6	39.8	536.5
250	17.3	31.1	38.3	536.3
300	16.8	34.3	37.1	536.1
500	15.2	45.3	33.8	535.6

Frequency (MHz)	PSNEXT (db) ≥	ELFEXT (dB) ≥	PSELFEXT (dB) ≥
1.0	72.3	67.8	64.8
4.0	63.3	55.8	52.8
8.0	58.8	49.7	46.7
10.0	57.3	47.8	44.8
16.0	54.4	43.7	40.7
20.0	52.8	37.8	38.8
25.0	41.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8
300	35.1	18.3	15.3
500	31.8	13.8	10.8

HEADQUARTERS



A&G Technologies CO., Limited,
Log 202, 5rue Albert Thomas, 38100
Grenoble, France.

+33 75 864 2169

REGIONAL OFFICE



A&G Technologies (HK) CO., Limited,
Room 803, Chevalier House, 45-51 Chatham Road
South, Tsim Sha Tsui, Kowloon, Hong Kong.

+852 5420 8788

CONNECT THE FUTURE



info@angnetworks.com



www.angnetworks.com