



CAT6 UTP CABLE 23AWG LSZH

108-61021

Phone
+33 75 864 2169

Email
info@angnetworks.com

Log 202, 5rue Albert Thomas, 38100
Grenoble, France.



Overview

- Category: U/UTP CAT6-4P-LSZH
- Sheath Printing: A&G CAT.6 U/UTP SOLID 23AWG×4P LSZH(UL)
- E525067 AG01 ETL VERIFIED to ANSI/TIA-568.2-D
- This CAT6 UTP cable is designed for high-speed data transmission and is suitable for various networking applications.

Industry Standard

- ISO/IEC11801
- TIA-568.2-D

Applications



- 10/100/1000Base T
- Telecommunications
- LAN
- Premise wiring

Ordering Information

Part Number	Description
108-61021	CAT. 6 UTP CABLE 23AWG LSZH 305M BOX

General Information

- Conductor Material: SOLID-Bare Copper
- Conductor Nominal Outer Diameter (O.D.): 0.550 mm (+0.005 up, -0.005 down)
- Insulation Material: HDPE (High-Density Polyethylene)
- Insulation Diameter: 0.98±0.05mm
- Sheath Outer Diameter: 6.1±0.4mm
- Sheath Surface: Clean, Frap, Satiation
- Sheath Material: LSZH (complies RoHS)
- Sheath Color: TBD
- Surface Printing Letter height: 3.0±0.3mm, Color: Black, Print error & Space: ≤±0.5%, 1m
- Core Color:
 1. White-Blue / Blue
 2. White-Orange / Orange
 3. White-Green / Green
 4. White-Brown / Brown
- Packing: Wooden Tray & Carton
- Carton Dimension: According to requirements
- Packing Length: (305+1.5)m
- Rip-cord: Yes
- Drain wire: No

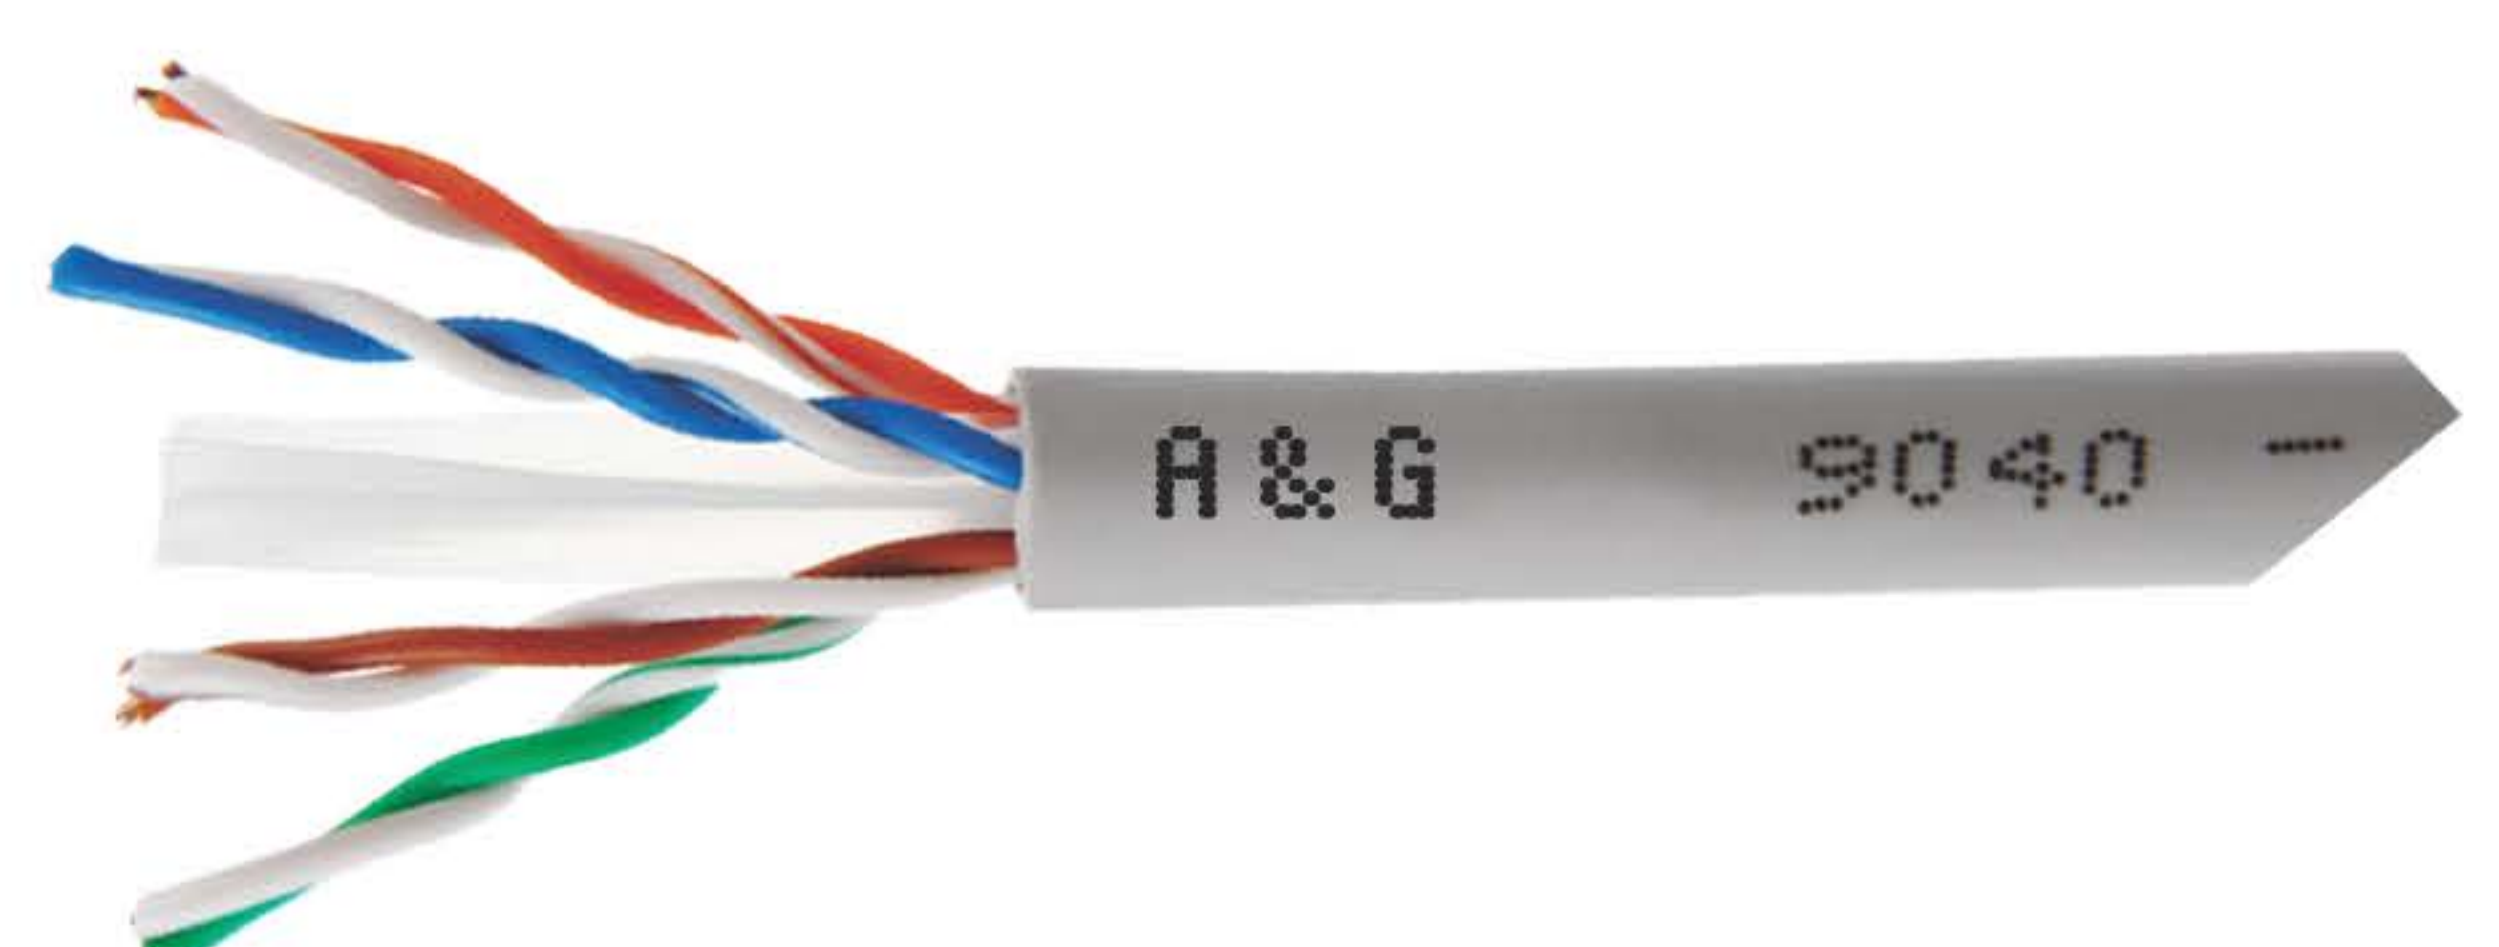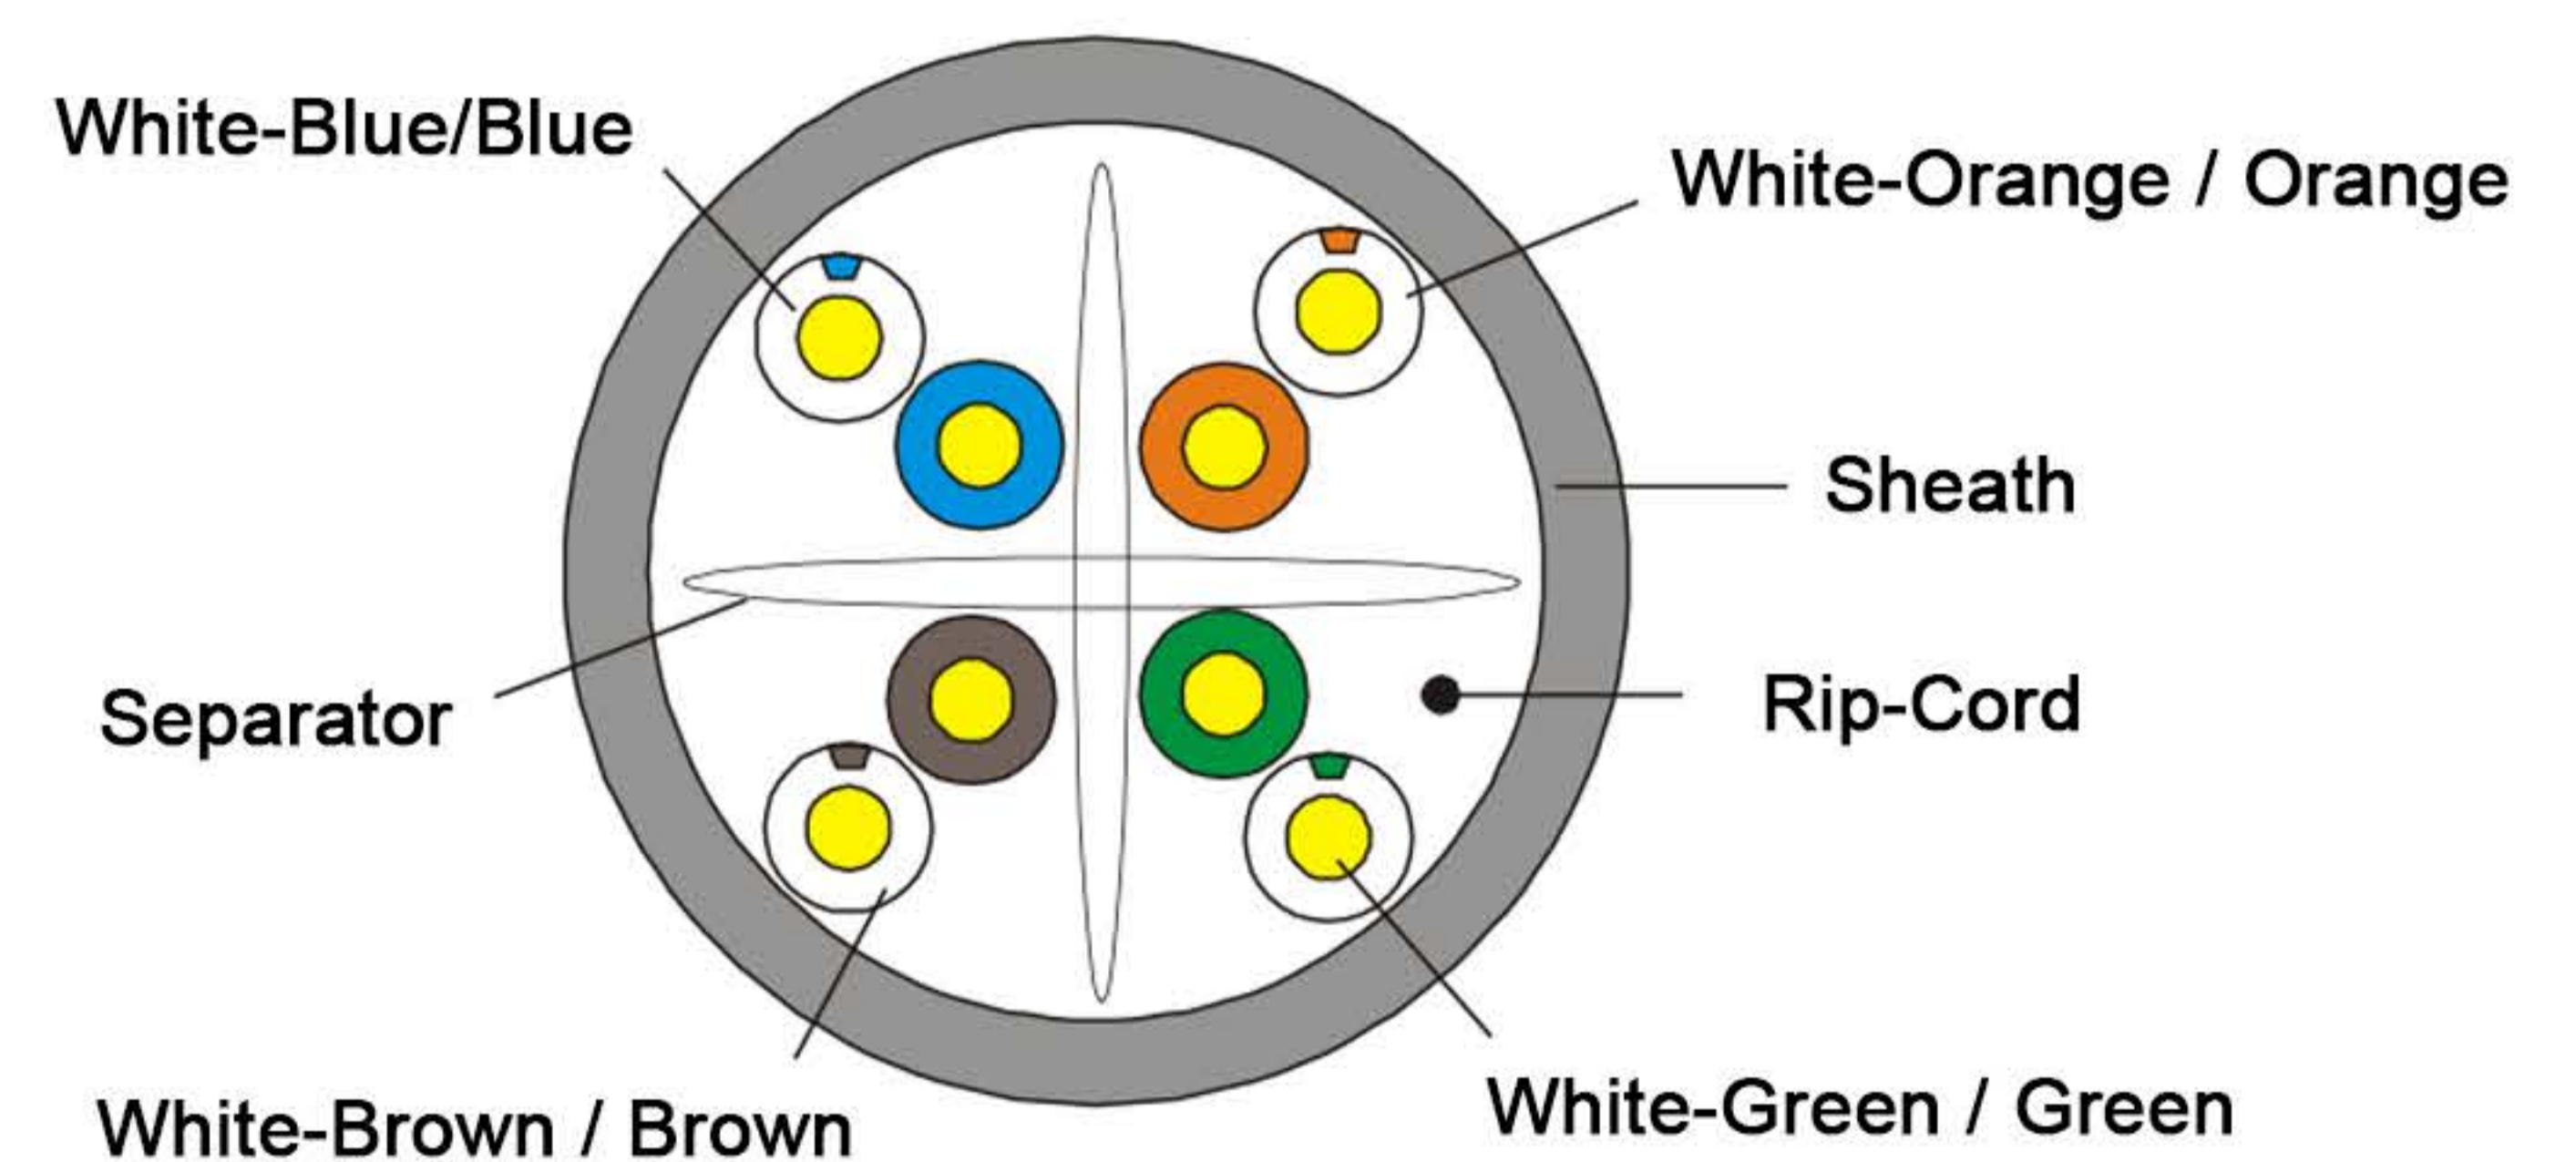

PRODUCT TECHNICAL SPECIFICATION | CAT6 UTP CABLE 23AWG LSZH

Product Electrical Characteristics:

- Impedance: $100 \pm 15\% \Omega$
- Delay Skew: ≤ 45 ns/100m
- DC Resistance: max 9.38 Ω /100m
- DC Conductor Resistance Unbalance: max 3.0% (20°C)
- Mutual Capacitance: Max. 5600pF/100m at 1kHz
- Pair to Ground Capacitance Unbalanced: Max. 1600pF/km at 1kHz

Sheath Physical Properties:

- Before Aging: Tensile Strength ≥ 13.5 Mpa, Elongation $\geq 150\%$
- After Aging (100°Cx24hx7d): Tensile Strength ≥ 12.5 Mpa, Elongation $\geq 125\%$
- Cold Bend (-20 \pm 2°Cx4h): No visible cracks, 8xCable O.D.
- Min. Bending Radius: 55N
- Max. Pulling Tension: 90N
- Installation Temperature: 0°C to +50°C
- Operating Temperature: -20°C to +60°C

Technical Performance (100m)

Frequency (MHz)	RL (\geq dB)	Attenuation (\leq dB)	NEXT (\geq dB)	Delay (\leq ns)
1.0	20.0	2.03	74.3	570.00
4.0	23.0	3.78	65.3	552.00
8.0	24.5	5.32	60.8	546.73
10.0	25.0	5.95	59.3	545.38
16.0	25.0	7.55	56.2	543.00
20.0	25.0	8.47	54.8	542.05
25.0	24.3	9.51	53.3	541.20
31.25	23.6	10.67	51.9	540.44
62.5	21.5	15.38	47.7	538.55
100	20.1	19.80	44.3	537.60
200	18.0	28.98	39.8	536.54
250	17.3	32.85	38.3	536.27

Frequency (MHz)	PSNEXT (db) \geq	ELFEXT (dB) \geq	PSELFEXT (dB) \geq
1.0	72.3	67.8	64.8
4.0	63.3	55.8	52.8
8.0	58.8	49.7	46.7
10.0	57.3	47.8	44.8
16.0	54.4	43.7	40.7
20.0	52.8	37.8	38.8
25.0	41.3	39.8	36.8
31.25	49.9	37.9	34.9
62.5	45.4	31.9	28.9
100	42.3	27.8	24.8
200	37.8	21.8	18.8
250	36.3	19.8	16.8

HEADQUARTERS



A&G Technologies CO., Limited,
Log 202, 5rue Albert Thomas, 38100
Grenoble, France.

+33 75 864 2169

REGIONAL OFFICE



A&G Technologies (HK) CO., Limited,
Room 803, Chevalier House, 45-51 Chatham Road
South, Tsim Sha Tsui, Kowloon, Hong Kong.

+852 5420 8788

CONNECT THE FUTURE



info@angnetworks.com



www.angnetworks.com